

2320 Central Street
Evanston, IL, 60201

October 13, 2005

Application 10/664,773

Carl D. Friedman
Supervisory Patent Examiner
USPTO

Dear Sir:

The conclusions reached in your response of September, 16, 2005 are not supported by an examination and comparison of the drawings in your citations 6,134,859 and 5,937,591 and our application.

When might we expect reform of the patent process?

Sincerely,

A handwritten signature in black ink that reads "Lawrence P. Conroy". The signature is written in a cursive, flowing style with a large, stylized "P" and "C".

Lawrence P. Conroy

cc:Jon Dudas, T.S. Robertson, E. Walsh




US 20050055966A1

(19) **United States**(12) **Patent Application Publication** (10) Pub. No.: **US 2005/0055966 A1****Conroy**(43) Pub. Date: **Mar. 17, 2005**(54) **INTEGRATED FRAMING SYSTEM**

Publication Classification

(76) Inventor: **Lawrence Peter Conroy, Evanston, IL (US)**(51) Int. Cl.⁷ **E04C 3/30**
(52) U.S. Cl. **52/720.1**Correspondence Address:
Lawrence P. Conroy
Suite 201
2320 Central Street
Evanston, IL 60201 (US)(57) **ABSTRACT**

All the basic structural components of frame construction are directly connected with one another including foundation plate, studs, floor and ceiling joists as well as rafters. The significant element of this integrated construction is a three-part composite stud easily constructed from commonly used construction lumber to form a totally unified framework which provides a much stronger, stable and desirable structure than that achieved by present construction methods.

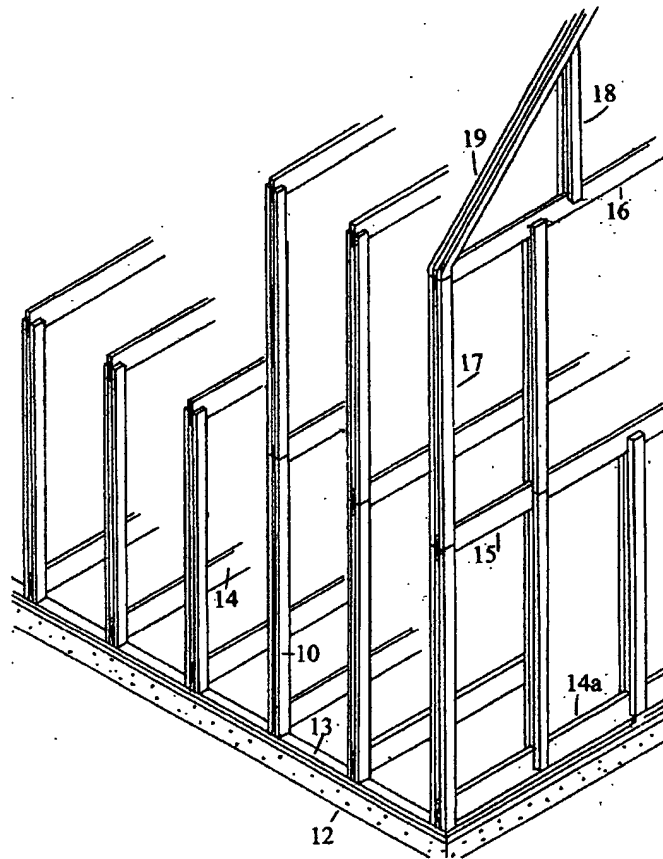(21) Appl. No.: **10/664,773**(22) Filed: **Sep. 17, 2003**

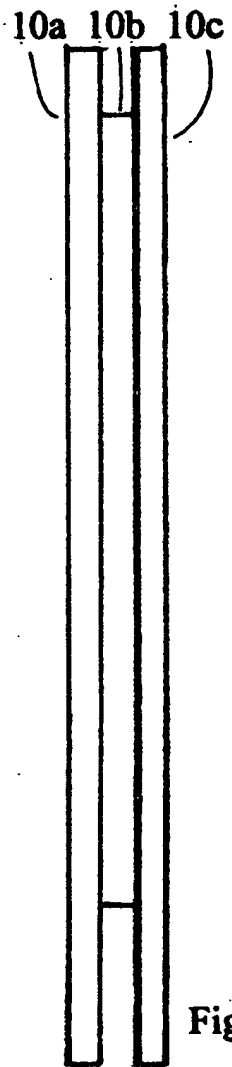


Fig. 1a

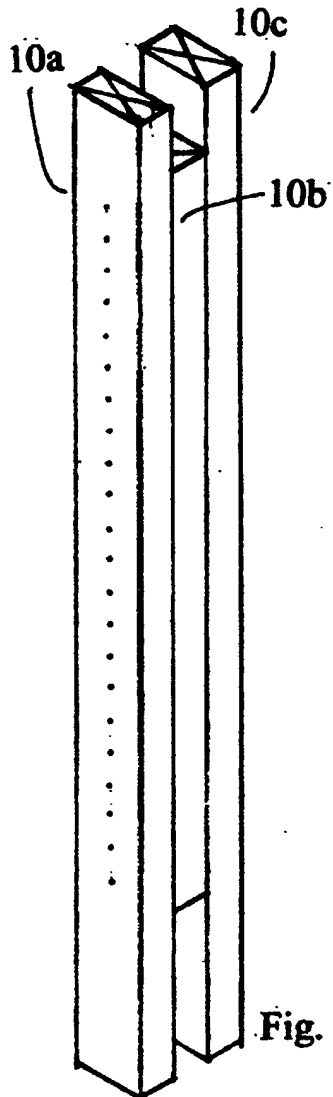


Fig. 1b

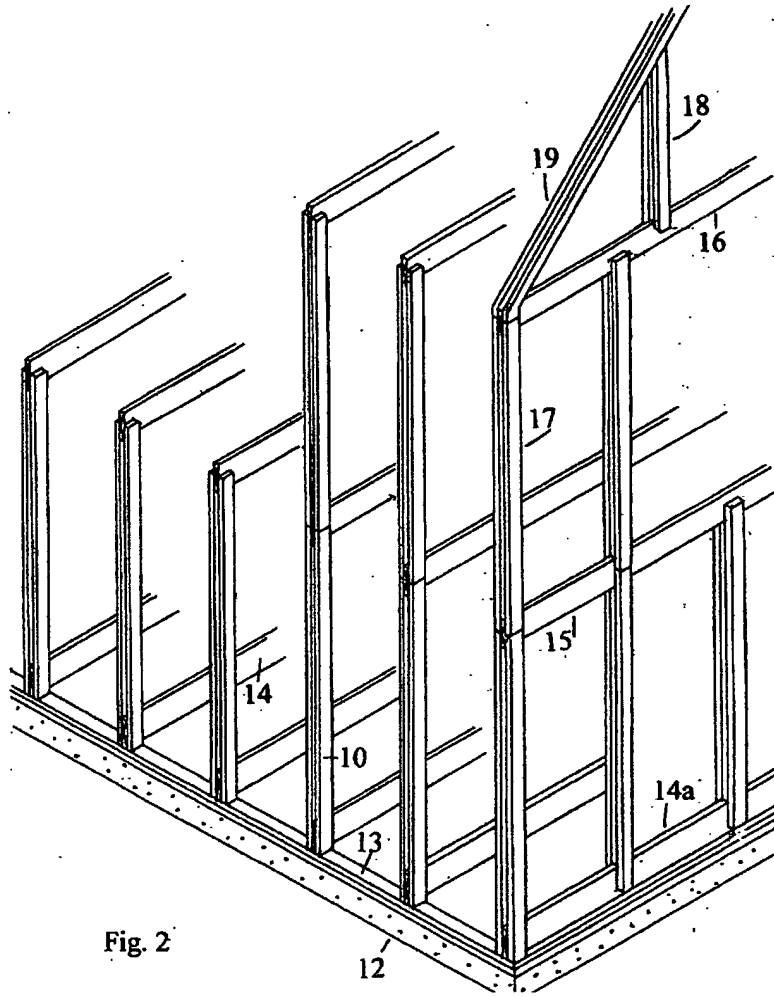
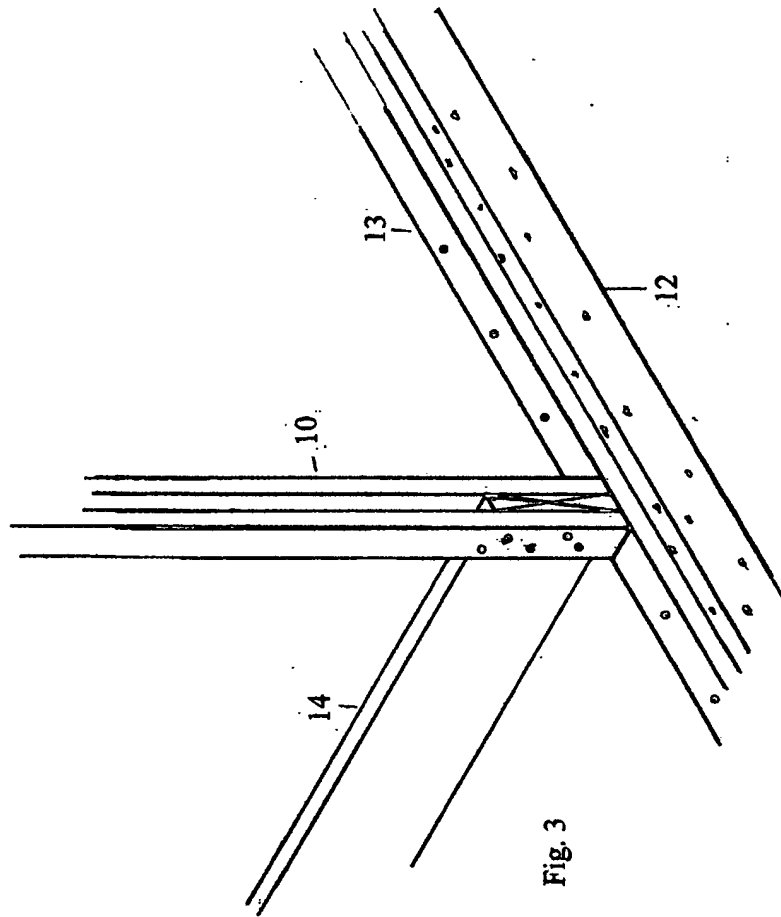


Fig. 2



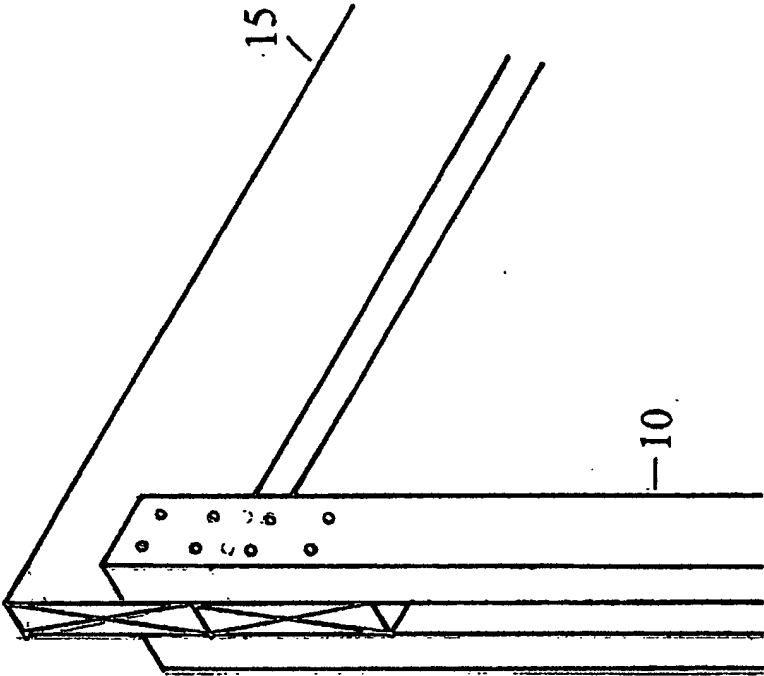


Fig. 4

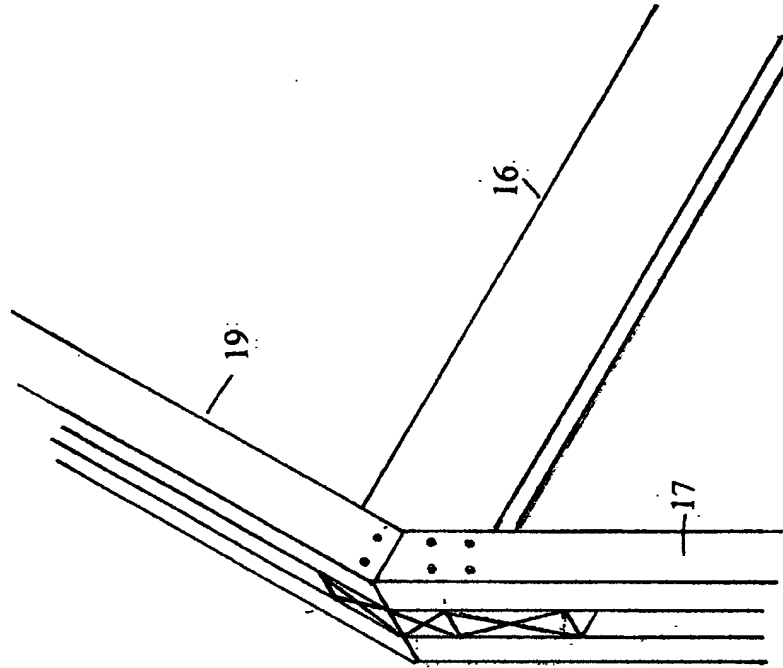


Fig. 5



US006134859A

United States Patent [19]

Rudd

[11] **Patent Number:** **6,134,859**
[45] **Date of Patent:** **Oct. 24, 2000**

[54] **METAL AND WOOD COMPOSITE FRAMING MEMBERS FOR RESIDENTIAL AND LIGHT COMMERCIAL CONSTRUCTION**

[75] **Inventor:** Armin F. Rudd, Cocoa, Fla.

[73] **Assignee:** University of Central Florida, Orlando, Fla.

[21] **Appl. No.:** 09/332,452

[22] **Filed:** Jun. 14, 1999

Related U.S. Application Data

[62] Division of application No. 08/974,898, Nov. 20, 1997, Pat. No. 5,921,054, which is a division of application No. 08/664,442, Jun. 21, 1996, abandoned.

[60] Provisional application No. 60/012,688, Mar. 1, 1996.

[51] **Int. Cl.⁷** E04C 3/30

[52] **U.S. CL.** 52/737.3; 52/376; 52/730.7; 52/731.8; 52/731.9; 52/738.1; 52/765

[58] **Field of Search** 52/730.7, 731.1, 52/731.8, 731.9, 737.3, 776, 765, 699, 481.1, 376

References Cited

U.S. PATENT DOCUMENTS

2,851,747 9/1958 Rolen .
3,310,324 3/1967 Boden .
3,531,901 10/1970 Will et al. .
3,960,637 6/1976 Ostrow .
4,031,686 6/1977 Sanford .
4,274,241 6/1981 Lindal .
4,301,635 11/1981 Neufeld .

4,466,225 8/1984 Hovind 52/730
4,875,316 10/1989 Johnston .
5,072,547 12/1991 DiFazio .
5,285,615 2/1994 Gilmour .
5,440,848 8/1995 Deffet .
5,452,556 9/1995 Taylor .
5,768,849 6/1998 Blazevic 52/737.3

Primary Examiner—Carl D. Friedman


Assistant Examiner—Yvonne M. Horton

Attorney, Agent, or Firm—Brian S. Steinberger, Law Offices of Brian S. Steinberger

[57] ABSTRACT

Metal and wood composites are used to create framing members (studs and tracks, joists and bands, rafters, headers and the like.) for lightweight construction. Metal is utilized for its high strength, resistance to rot and insects, cost stability, and potentially lower cost through recycling. Metal that can be used includes roll formed steel approximately 18–22 gauge. Wood is used primarily for its lower thermal conductivity, and availability. The metal components form the primary structure while wood, either solid or other engineered wood, provides some structure and a thermal break. The invention connects J-shaped or triangular shaped metal forms to wood sections. The metal flange ends can have various J, C, L, right triangular, triangular, T and straight line cross-sectional shapes. The wood is fastened to the metal by machine pressing of the metal to wood. Alternatively the fastening includes nails, staples, screws, and the like, and also by adhesive glue. The outward faces of the metal members are preformed with four longitudinal ridges such that the contact surface area to applied sheathings is reduced by about 90%.

3 Claims, 7 Drawing Sheets

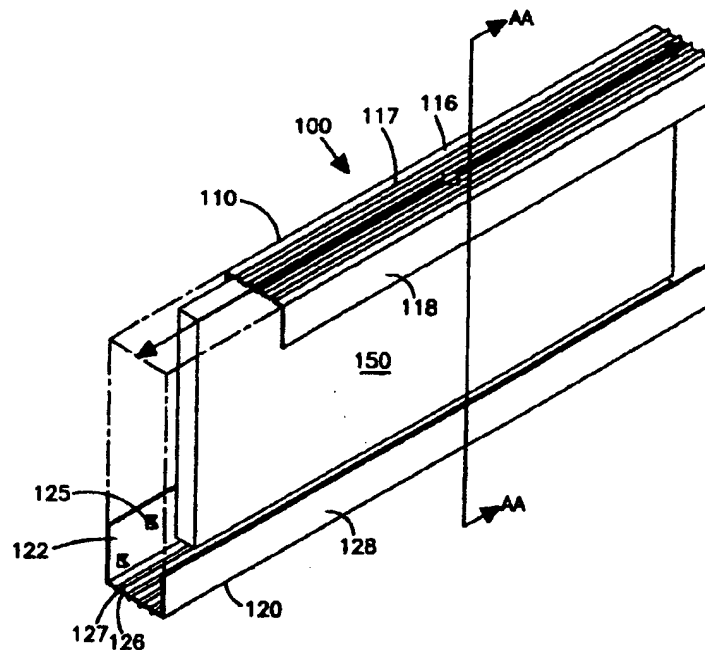



US005937591A

United States Patent [19] Markey

[11] Patent Number: 5,937,591
[45] Date of Patent: Aug. 17, 1999

[54] BUILDING CONSTRUCTIONS

[75] Inventor: Dennis P. Markey, Franklin, Mich.

[73] Assignee: Handy Home Products, Inc., Warren, Mich.

[21] Appl. No.: 08/818,736

[22] Filed: Mar. 14, 1997

Related U.S. Application Data

[62] Division of application No. 08/529,132, Sep. 15, 1995, Pat. No. 5,666,766.

[51] Int. Cl.⁶ E04B 7/04

[52] U.S. Cl. 52/94; 52/91.2; 52/92.1; 52/92.3

[58] Field of Search 52/90.1, 91.1, 52/92.1, 92.2, 92.3, 93.2, 94, 270

[56] References Cited

U.S. PATENT DOCUMENTS

352,011	11/1886	Shelton	52/92.3
1,761,289	6/1930	Beale	52/92.3
2,280,687	4/1942	Connelly	52/92.2
2,320,466	6/1943	Presley	52/92.1

4,573,293	3/1986	Park	52/92.1
4,630,418	12/1986	Degut	52/270 X
5,293,725	3/1994	Matticks et al.	52/92.2 X
5,335,462	8/1994	Park	52/92.1 X
5,501,043	3/1996	Park	52/92.1

Primary Examiner—Card D. Friedman


Assistant Examiner—Winnie S. Yip

Attorney, Agent, or Firm—Harness, Dickey & Pierce, P.C.

[57] ABSTRACT



The present invention relates to building constructions which are relatively inexpensive and easy to assemble. Under a first embodiment, a building construction comprised of a lower portion and an upper portion wherein the lower portion includes a plurality of walls having a radially outwardly extending top plate which serves to support the upper portion of the building and assists in providing the building with an exaggerated eave is disclosed. Under a second embodiment, the building construction includes a plurality of inner and outer frame members wherein the outer frame members serve the additional function of a trim assembly. As the building constructions of the present invention are relatively easy to construct, the building constructions can be sold as a kit for construction by individuals having relatively little experience in the construction field.

8 Claims, 9 Drawing Sheets

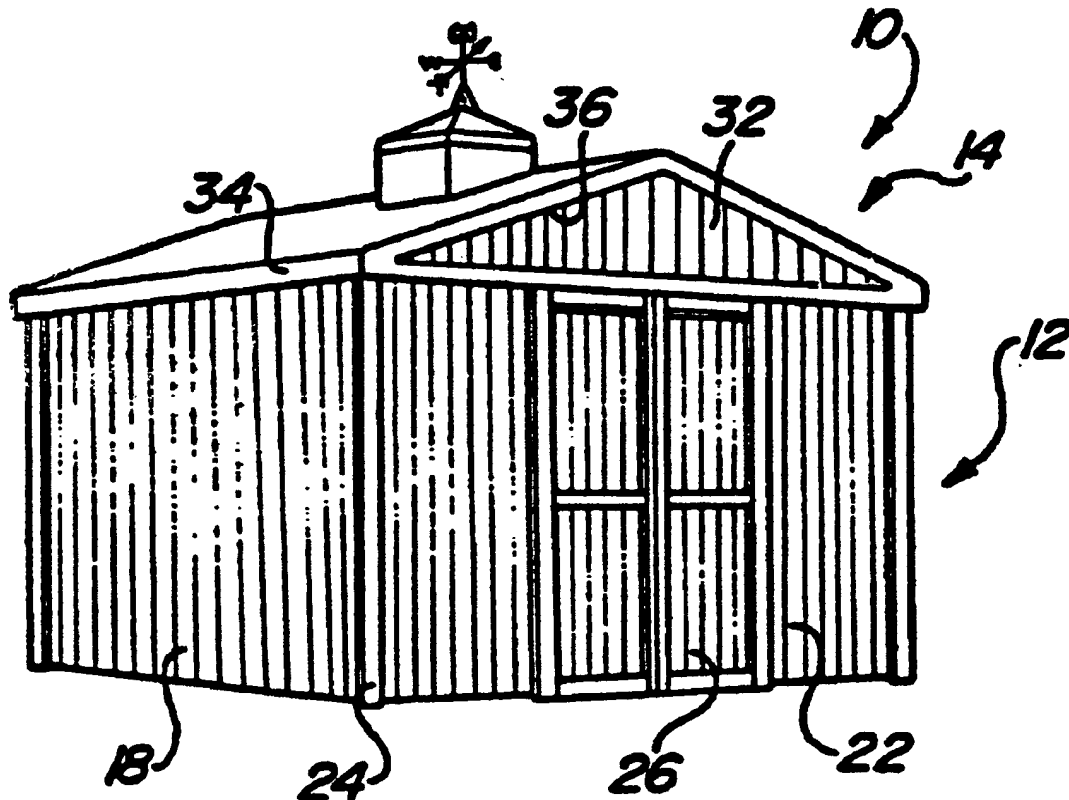



Mr. Larry P. Conroy
2320 Central St. Apt. 201
Evanston, IL 60201-1414

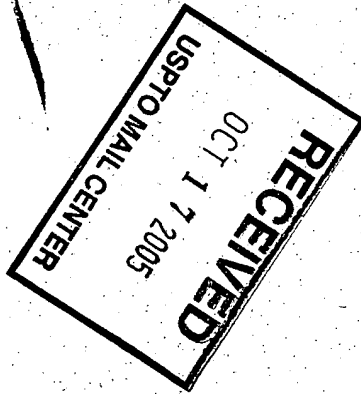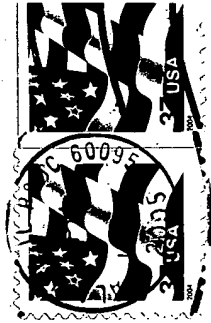

MR. JON DUDAS
DIRECTOR
U.S. PATENT & TRADEMARK OFFICE
P.O. BOX 1450
ALEXANDRIA, VA., 22313-1450